



Energy System Modelling Using OSeMOSYS

Hands-on 14

Please use the following citation for:

- **This exercise**

Plazas-Niño, F. (2025, February). Hands-on 14: Energy System Modelling Using OSeMOSYS (Version 1.0.). Climate Compatible Growth. DOI: 10.5281/zenodo.14871610

- **OSeMOSYS UI software**

Climate Compatible Growth. (2024). MUIO (Version v5.0.0). GitHub. <https://github.com/OSeMOSYS/MUIO/releases>

- **OSeMOSYS forum**

Please sign up to the help forum [here](#). If you are stuck, please ask questions here. If you get ahead, please answer questions in the same forum. Please state that you are using the MUIO Interface.

Learning outcomes

By the end of this exercise, you will be able to:

- 1) Create scenarios using MUIO
- 2) Develop assumptions to design various scenarios in an OSeMOSYS model


Creating scenarios in MUIO

In this hands-on exercise, we will not add new technologies or commodities.

IMPORTANT: Before proceeding, you must copy the model and rename it as you have done before (this time as OSeHO14).

As we discussed in Lecture 15, the scenario that we can run after calibrating our model represents the Least-cost scenario. Being said that, we already have that model done from our previous hands-on practice. We will complement the analysis by modelling three additional scenarios. We will explore the Business-as-usual scenario, Renewable target scenario, and Emission Limit scenario.

The first step is to create these scenarios in MUIO. Navigate to the Configuration tab and select the Scenarios section. Rename the default scenario from SC_0 to LC and update the description from 'Base scenario' to 'Least-cost scenario.' Next, click on +Add scenario on the right and create three additional scenarios. Rename the scenarios as shown in the image below. Finally, click on Update Model to save the changes.

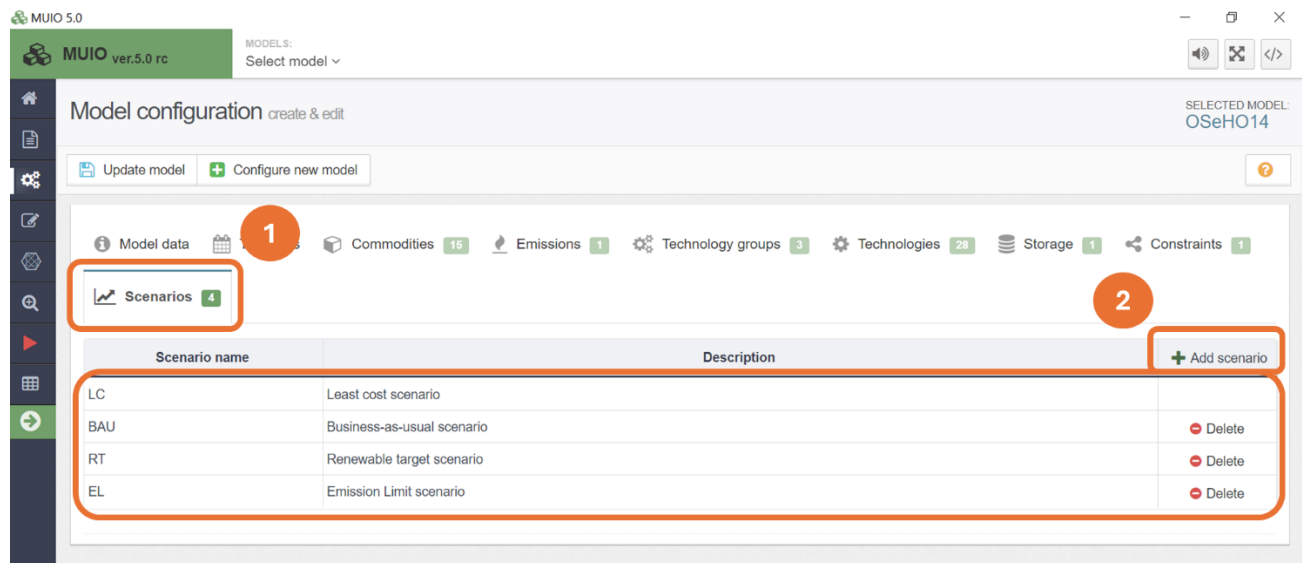


Next, we will define each scenario by adding the relevant parameters.

Business-as-usual scenario

In the BAU scenario, we assume that current trends, policies, and technologies are maintained in the long term. In OSeMOSYS, this scenario can be represented by constraining the energy supply to reflect the most representative technologies in each sector. Using the share of each technology in the last year of calibration (2023), we will maintain these shares from 2024 to 2030. From 2031 to 2035, we will allow a 10% share for new technologies to compete in meeting energy demands. These calculations will be added as parameters in the Total Technology Annual Activity Lower Limit. You can find these calculations in the [Data Preparation file OSeHO14](#).

Try It: Add the Total Technology Annual Activity Lower Limit parameters for the BAU scenario.


1. Click on the data entry button, and in the search bar, type '**Total Technology Annual Activity Lower Limit.**' Then, navigate to that parameter.
2. Click the line diagram button located next to the parameter name, as illustrated in the image below.

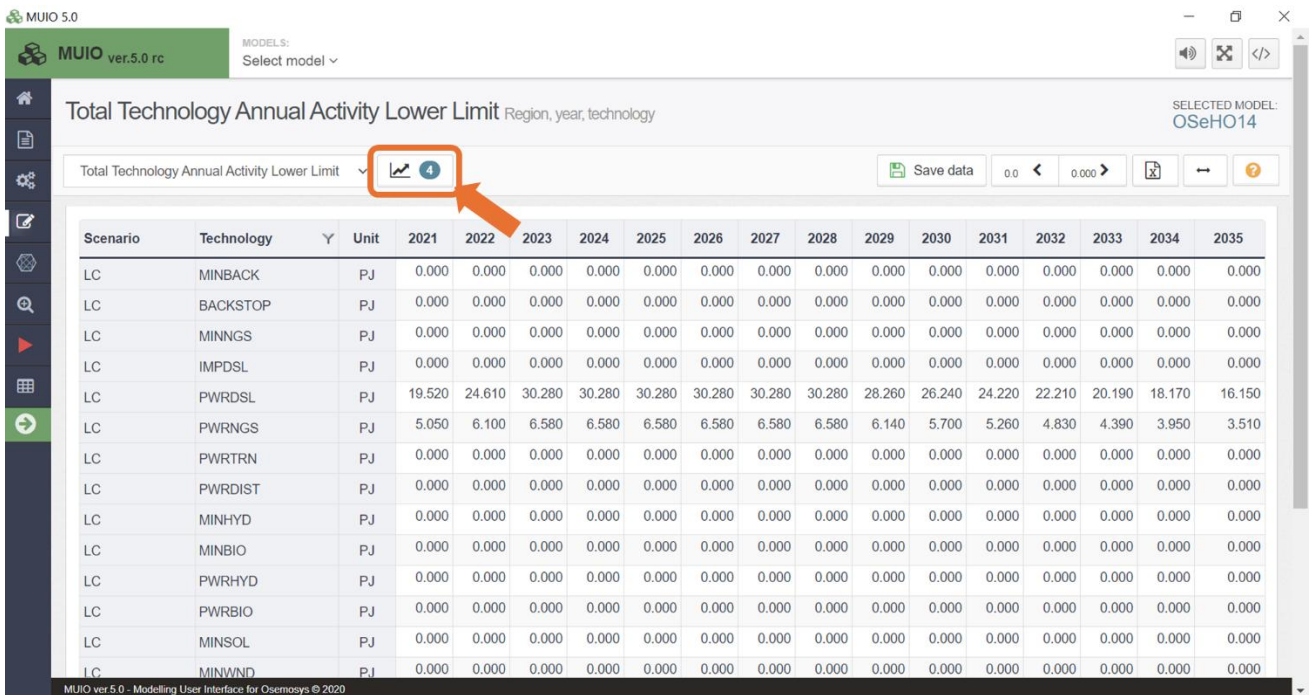

The screenshot shows the MUIO 5.0 interface with the 'Total Technology Annual Activity Lower Limit' parameter selected. The interface includes a search bar, a 'Save data' button, and a table of data for various scenarios and technologies from 2021 to 2035. An orange box highlights the line diagram icon next to the parameter name, with an arrow pointing to it.

Scenario	Technology	Y	Unit	2021	2022	2023	2024	2025	2026	2027	2028	2029	2030	2031	2032	2033	2034	2035
LC	MINBACK		PJ	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
LC	BACKSTOP		PJ	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
LC	MINNGS		PJ	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
LC	IMPDSL		PJ	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
LC	PWRDSL		PJ	19.520	24.610	30.280	30.280	30.280	30.280	30.280	30.280	28.260	26.240	24.220	22.210	20.190	18.170	16.150
LC	PWRNGS		PJ	5.050	6.100	6.580	6.580	6.580	6.580	6.580	6.580	6.140	5.700	5.260	4.830	4.390	3.950	3.510
LC	PWRTRN		PJ	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
LC	PWRDIST		PJ	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
LC	MINHYD		PJ	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
LC	MINBIO		PJ	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
LC	PWRHYD		PJ	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
LC	PWRBIO		PJ	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
LC	MINSOL		PJ	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
LC	MINWIND		PJ	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000

- Click on the folder icon to open the scenario data. By default, the BAU scenario will be selected in this case

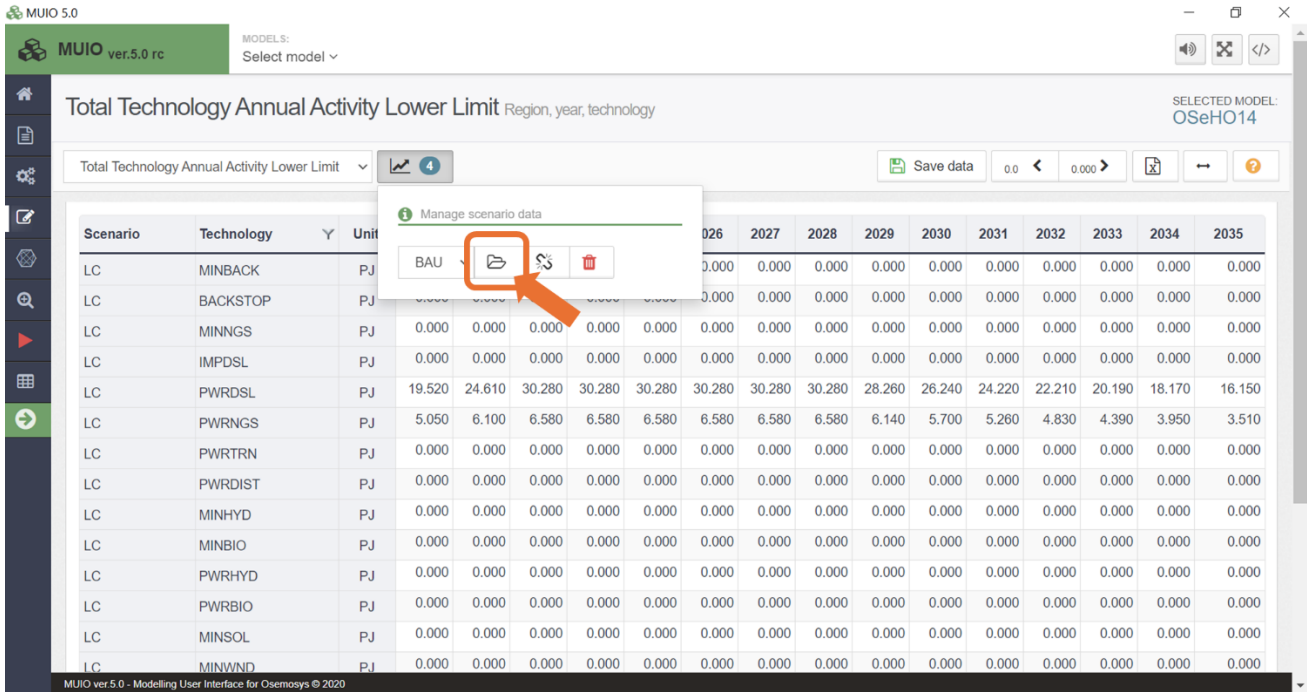

The screenshot shows the MUIO 5.0 interface with the 'Total Technology Annual Activity Lower Limit' table. A 'Manage scenario data' dialog box is open, showing a list of scenarios with 'BAU' selected. A red box highlights the folder icon next to 'BAU', and an orange arrow points to it.

Scenario	Technology	Y	Unit	2026	2027	2028	2029	2030	2031	2032	2033	2034	2035					
LC	MINBACK	PJ		0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000					
LC	BACKSTOP	PJ		0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000					
LC	MINNGS	PJ		0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000					
LC	IMPDSL	PJ		0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000					
LC	PWRDSL	PJ		19.520	24.610	30.280	30.280	30.280	30.280	30.280	28.260	26.240	24.220	22.210	20.190	18.170	16.150	
LC	PWRNGS	PJ		5.050	6.100	6.580	6.580	6.580	6.580	6.580	6.580	6.140	5.700	5.260	4.830	4.390	3.950	3.510
LC	PWRTRN	PJ		0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	
LC	PWRDIST	PJ		0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	
LC	MINHYD	PJ		0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	
LC	MINBIO	PJ		0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	
LC	PWRHYD	PJ		0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	
LC	PWRBIO	PJ		0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	
LC	MINSOL	PJ		0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	
LC	MINWND	PJ		0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	

- Once the BAU scenario data is activated, the parameters for the second scenario will appear below those of the first scenario. To locate them, display additional rows and scroll down. By default, these parameters will be empty and marked as 'n/a.'

MUIO 5.0

ML	BAU	MINBIO	PJ	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a
BAU	PWRHYD	PJ	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a
BAU	PWRBIO	PJ	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a
BAU	MINSOL	PJ	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a
BAU	MINWND	PJ	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a
BAU	PWRSOL	PJ	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a
BAU	PWRWND	PJ	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a
BAU	BATTPWR	PJ	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a
BAU	IMPLPG	PJ	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a
BAU	DEMRESCKNLPG	PJ	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a
BAU	DEMRESCKNBIO	PJ	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a
BAU	DEMRESCKNELC	PJ	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a
BAU	DEMINDLHELPG	PJ	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a
BAU	DEMINDLHENG	PJ	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a
BAU	DEMINDLHEELC	PJ	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a
BAU	DEMTRACARGSL	PJ	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a
BAU	DEMTRACARNGS	PJ	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a
BAU	DEMTRACARELC	PJ	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a
BAU	IMPGSL	PJ	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a

Go to page: 1 Show rows 100 1-56 of 56

MUIO ver 5.0 - Modelling User Interface for Osemosys © 2020

- Copy and paste the data for the years 2021–2035 for the corresponding technologies from the [Data Preparation file OSeHO14](#). The input should resemble the image shown below.

MUIO 5.0

BAU	PWRDSL	PJ	19.520	24.610	30.280	35.320	40.370	45.410	50.460	55.510	60.550	65.600	66.340	71.080	75.820	80.560	85.300
BAU	PWRNGS	PJ	5.050	6.100	6.580	7.680	8.770	9.870	10.970	12.060	13.160	14.250	11.050	11.840	12.630	13.420	14.210
BAU	PWRTRN	PJ	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a
BAU	PWRDIST	PJ	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a
BAU	MINHYD	PJ	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a
BAU	MINBIO	PJ	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a
BAU	PWRHYD	PJ	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a
BAU	PWRBIO	PJ	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a
BAU	MINSOL	PJ	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a
BAU	MINWND	PJ	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a
BAU	PWRSOL	PJ	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a
BAU	PWRWND	PJ	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a
BAU	BATTPWR	PJ	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a
BAU	IMPLPG	PJ	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a
BAU	DEMRESCKNLPG	PJ	2.500	2.500	2.600	2.660	2.720	2.780	2.840	2.900	2.950	3.010	2.810	2.870	2.920	2.980	3.030
BAU	DEMRESCKNBIO	PJ	1.700	1.800	1.800	1.840	1.880	1.920	1.960	2.000	2.050	2.090	1.870	1.900	1.940	1.980	2.010
BAU	DEMRESCKNELC	PJ	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a
BAU	DEMINDLHELPG	PJ	12.000	15.000	18.000	21.000	24.000	27.000	30.000	33.000	36.000	39.000	37.800	40.500	43.200	45.900	48.600
BAU	DEMINDLHENGSL	PJ	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a
BAU	DEMINDLHEELC	PJ	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a
BAU	DEMTRACARGSL	PJ	22.000	23.000	24.000	25.000	26.000	27.000	28.000	29.000	30.000	31.000	28.800	29.700	30.600	31.500	32.400

MUIO ver 5.0 - Modelling User Interface for Osemosys © 2020

6. Save the data and update the model.

Renewable target scenario

In the Renewable Target (RT) scenario, we will aim to achieve at least 50% of electricity production from renewable sources by 2030, progressively increasing to at least 80% by 2035. While this is an ambitious target, it provides an opportunity to explore how to set and implement such goals using OSeMOSYS. As discussed in Lecture 15, we can incorporate a renewable target by adding a User Defined Constraint (UDC). In this case, activity multipliers are used since we are dealing with electricity production (i.e., the activity of power plant technologies). The corresponding inequality is shown below.




$$\text{Input Activity Ratio of Transmission} * \text{Percentage Target} * \text{Transmission Activity} < \sum_{t=1}^n \text{Renewable Technology Activity}_t$$

$$\text{Input Activity Ratio of Transmission} * \text{Percentage Target} * \text{Transmission Activity} - \sum_{t=1}^n \text{Renewable Technology Activity}_t < 0$$


The multiplication of the transmission activity by its input activity ratio gives the total electricity production feeding the transmission technology. By multiplying this total electricity production by the percentage target, we calculate the amount of energy required to be produced by renewable technologies. This amount must then be greater than or equal to the sum of electricity generated by renewable technologies (e.g., solar, wind, hydro, and biomass). By rearranging the equation and moving the terms to one side, we obtain the standard form of a UDC. In this form, the UDC constant becomes zero, the UDC activity multipliers for all renewable energy technologies are set to -1, and the activity multiplier for the transmission technology is set to the input activity ratio multiplied by the percentage target.

Try It: Add the UDC activity multiplier parameters for the RT scenario.

1. First, let's add a new UDC. On the model configuration page, navigate to the 'Constraints' tab and click on '+ Add Constraint.' This constraint will be an inequality, as explained previously. Select the relevant technologies for this constraint, which include the renewable power plants and transmission: PWRHYD, PWRBIO, PWR SOL, PWRWND, and PWRTRN.

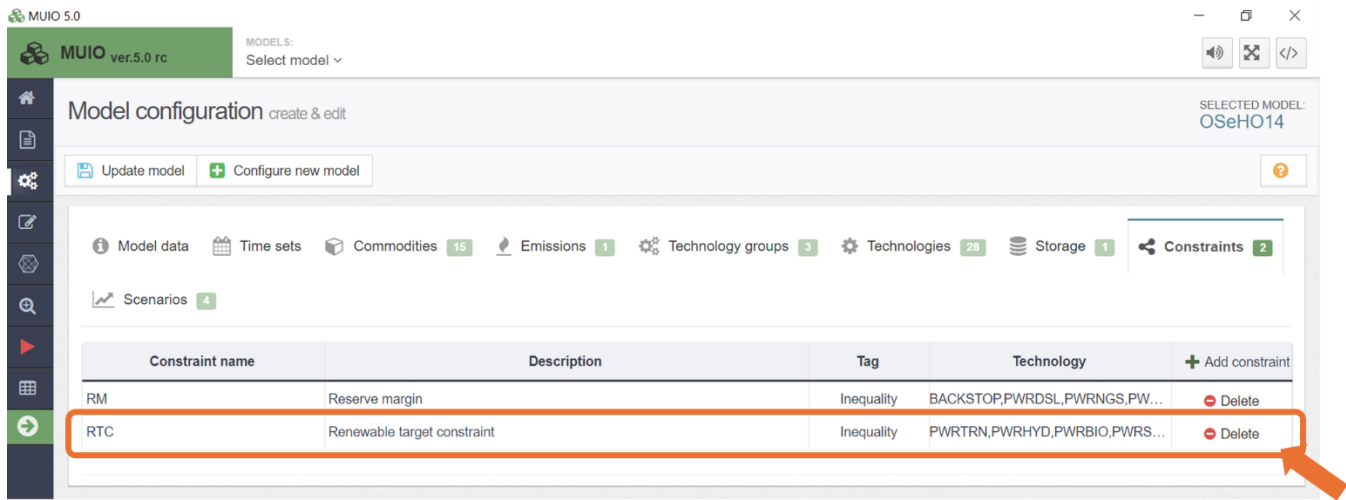

2. Update the model.
3. Click on the data entry button, and in the search bar, type '**UDC Multiplier Activity.**' Then, navigate to that parameter.
4. Click the line diagram button located next to the parameter name, as illustrated in the image below.

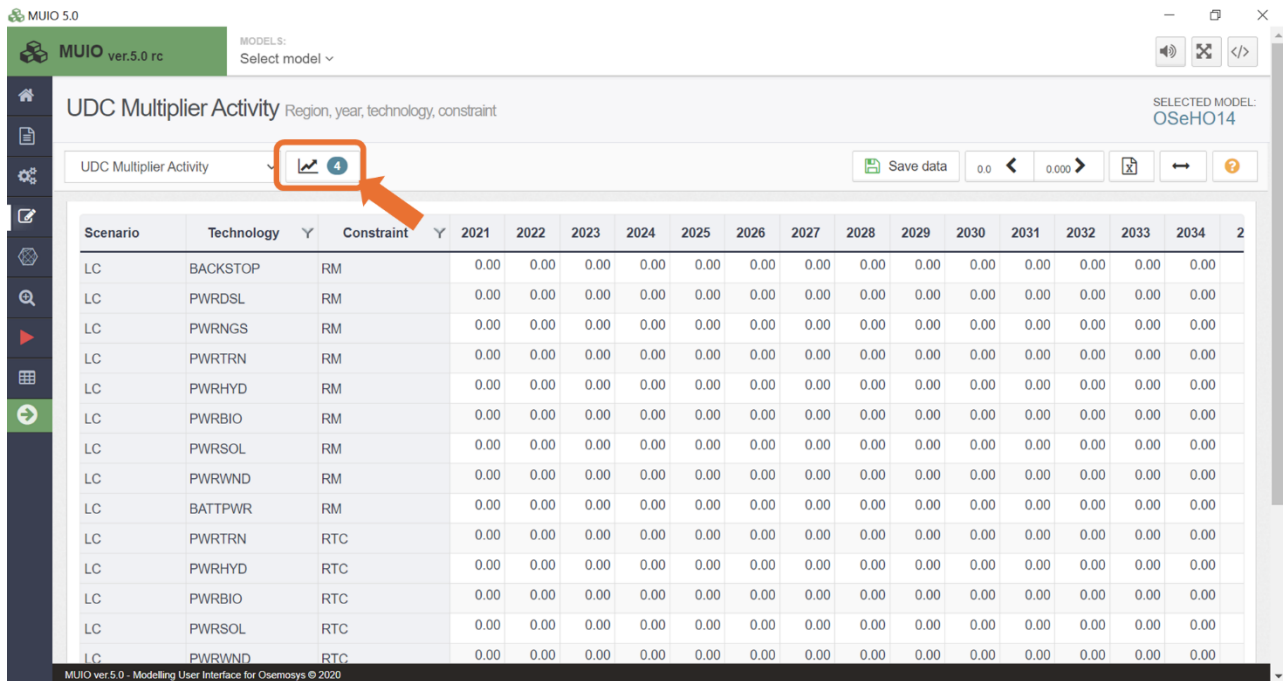

5. Select the RT scenario in the drop-down list and click on the folder icon to open the scenario data.

MUIO 5.0

MUIO ver.5.0 rc

MODELS: Select model

UDC Multiplier Activity Region, year, technology, constraint

SELECTED MODEL: OSeHO14

UDC Multiplier Activity

Save data 0.0 0.000

Scenario	Technology	2024	2025	2026	2027	2028	2029	2030	2031	2032	2033	2034	2
LC	BACKSTOP	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
LC	PWRDSL	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
LC	PWRNGS	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
LC	PWRTRN	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
LC	PWRHYD	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
LC	PWRBIO	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
LC	PWRSOL	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
LC	PWRWND	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
LC	BATTPWR	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
LC	PWRTRN	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
LC	PWRHYD	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
LC	PWRBIO	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
LC	PWRSOL	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
LC	PWRWND	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

MUIO ver 5.0 - Modelling User Interface for Osemosys © 2020

- Once the RT scenario data is activated, the parameters for this second scenario will appear below those of the first scenario. To locate them, display additional rows and scroll down. By default, these parameters will be empty and marked as 'n/a.'
- Copy and paste the data for the years 2021–2035 for the corresponding technologies from the [Data Preparation file OSeHO14](#). The input should resemble the image shown below. Be careful with selecting the right scenario (RT) and constraint (RTC).

MUIO 5.0

LC	PWRTRN	RTC	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
LC	PWRHYD	RTC	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
LC	PWRBIO	RTC	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
LC	PWRSOL	RTC	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
LC	PWRWND	RTC	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
RT	BACKSTOP	RM	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a
RT	PWRDSL	RM	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a
RT	PWRNGS	RM	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a
RT	PWRTRN	RM	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a
RT	PWRHYD	RM	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a
RT	PWRBIO	RM	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a
RT	PWRSOL	RM	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a
RT	PWRWND	RM	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a
RT	BATTPWR	RM	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a
RT	PWRTRN	RTC	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.53	0.59	0.65	0.71	0.78
RT	PWRHYD	RTC	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	-1.00	-1.00	-1.00	-1.00	-1.00
RT	PWRBIO	RTC	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	-1.00	-1.00	-1.00	-1.00	-1.00
RT	PWRSOL	RTC	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	-1.00	-1.00	-1.00	-1.00	-1.00
RT	PWRWND	RTC	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	-1.00	-1.00	-1.00	-1.00	-1.00

Go to page: 1 Show rows: 100 1-28 of 28

MUIO ver.5.0 - Modelling User Interface for Osemosys © 2020


8. Save the data and update the model.

Emission limit scenario


In the Emission Limit (EL) scenario, we will introduce a carbon budget to systematically reduce emissions. This type of scenario is commonly modeled in Nationally Determined Contributions (NDC) assessments. To create a carbon budget, the national emissions inventory for each country or region can be used to define the initial emissions level and determine the rate of reduction over time based on the desired level of ambition. In OSeMOSYS, this is achieved by defining the Annual Emission Limit parameter, which specifies the maximum allowable amount of a particular emission type for each year.

Try It: Add the Annual Emission Limit parameters for the EL scenario.

1. Click on the data entry button, and in the search bar, type 'Annual Emission Limit.' Then, navigate to that parameter.
2. Click the line diagram button located next to the parameter name, as illustrated in the image below.

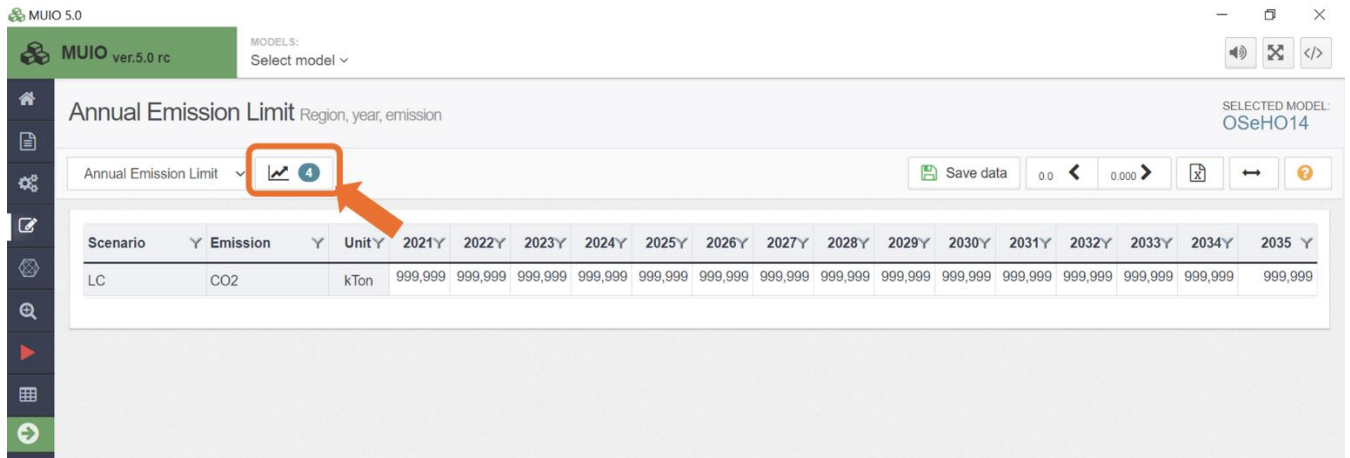

3. Select the EL scenario in the drop-down list and click on the folder icon to open the scenario data.

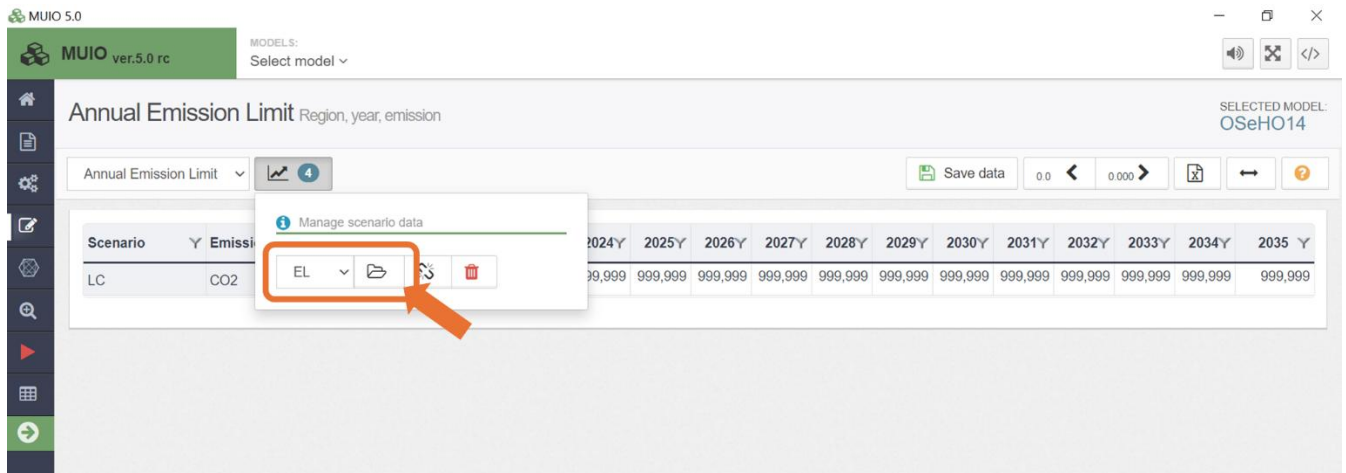

4. Once the EL scenario data is activated, the parameters for this scenario will appear below those of the first scenario. By default, these parameters will be empty and marked as 'n/a.'



- Copy and paste the data for the years 2021–2035 from the [Data Preparation file OSeHO14](#). The input should resemble the image shown below. The first years are unconstrained since they are the calibration years.

MUIO 5.0
MUIO ver.5.0 rc
MODELS: Select model v
Annual Emission Limit Region, year, emission
SELECTED MODEL: OSeHO14
Save data 0.0 0.000

Scenario	Emission	Unit	2021Y	2022Y	2023Y	2024Y	2025Y	2026Y	2027Y	2028Y	2029Y	2030Y	2031Y	2032Y	2033Y	2034Y	2035Y
LC	CO2	kTon	999,999	999,999	999,999	999,999	999,999	999,999	999,999	999,999	999,999	999,999	999,999	999,999	999,999	999,999	999,999
EL	CO2	kTon	999,999	999,999	999,999	14,000	14,250	14,500	14,750	14,250	13,750	13,000	12,500	12,000	11,500	11,000	10,500

- Save the data and update the model.**

Run the model and check the results

Running the model this time will differ slightly to incorporate scenarios. Follow these steps:

- Click the red play button as usual to start a case.
- Name the scenario "LC" and optionally add a description.
- Click the Scenarios button, as shown in the image below.



MUIO 5.0

MUIO ver.5.0 rc

MODELS: Select model

SELECTED MODEL: OSeHO14

Run model

Case data

Case name: LC

Case description

Note: description is not required field.

Scenarios


Create case

Cases

OSeHO3	<input type="checkbox"/>	Hands-on 3 [16/12/2024, 20:38:31]	SC_0	
OSeHO5	<input type="checkbox"/>	[30/12/2024, 15:17:33]	SC_0	
OSeHO6	<input type="checkbox"/>	[30/12/2024, 15:31:26]	SC_0	
OSeHO7	<input type="checkbox"/>	[30/12/2024, 15:58:39]	SC_0	
OSeHO8	<input type="checkbox"/>	[30/12/2024, 16:30:55]	SC_0	
OSeHO9	<input type="checkbox"/>	[31/12/2025, 15:17:12]	SC_0	

MUIO ver 5.0 - Modelling User Interface for Osemosys © 2020

4. Uncheck all scenarios except the LC scenario and click Save.

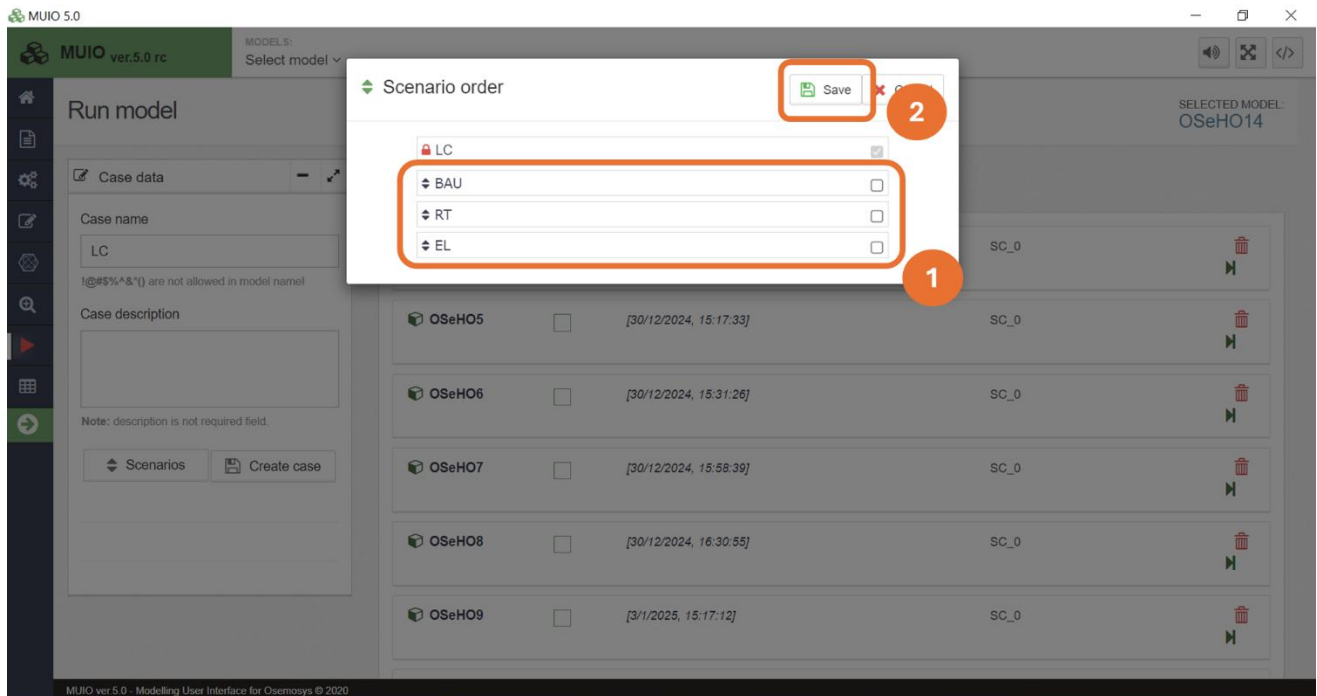



Note: All scenarios are selected by default, meaning the modified parameters in each scenario overwrite the baseline scenario.

Important: If two scenarios have different values for the same parameter, the values from the latest scenario in the list will take precedence.


5. Follow the usual procedure by pressing the corresponding button to create a case. Then press the Data file button to generate the input data file for the optimization process. Finally click RUN MODEL.

Once this step is completed, the case for the LC scenario will be created. Next, we need to create three additional cases for the corresponding scenarios. Assign each case its respective scenario name (BAU, RT, and EL) and select the appropriate scenario from the scenario list.

For example, in the BAU scenario, the selection should match the example shown in the image below. Then, follow the previously reviewed steps for each case.

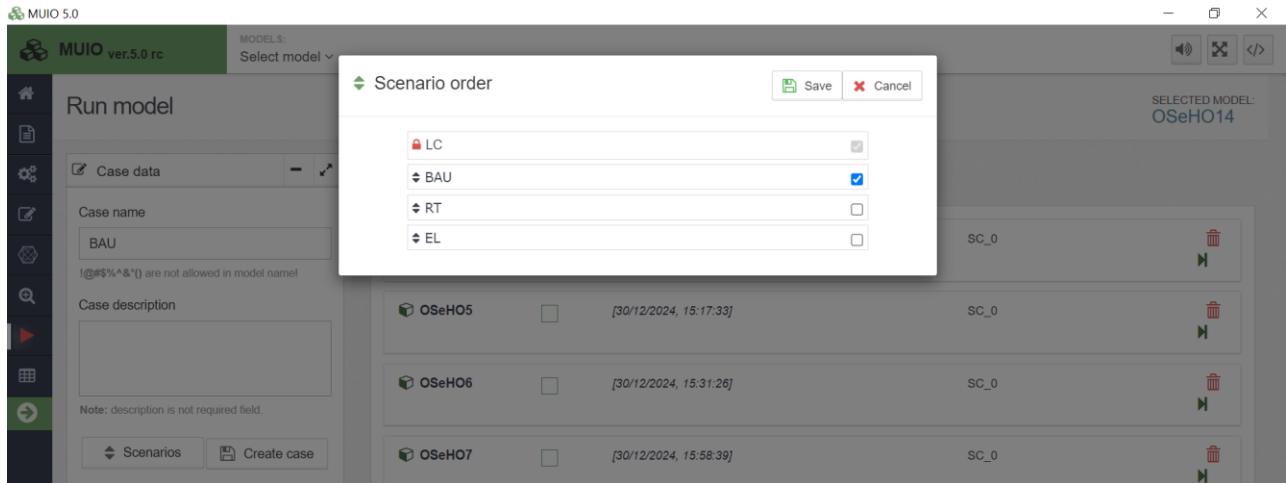


At the end of the process, you should have four successful runs in your data cases. The list should look similar to the image below.

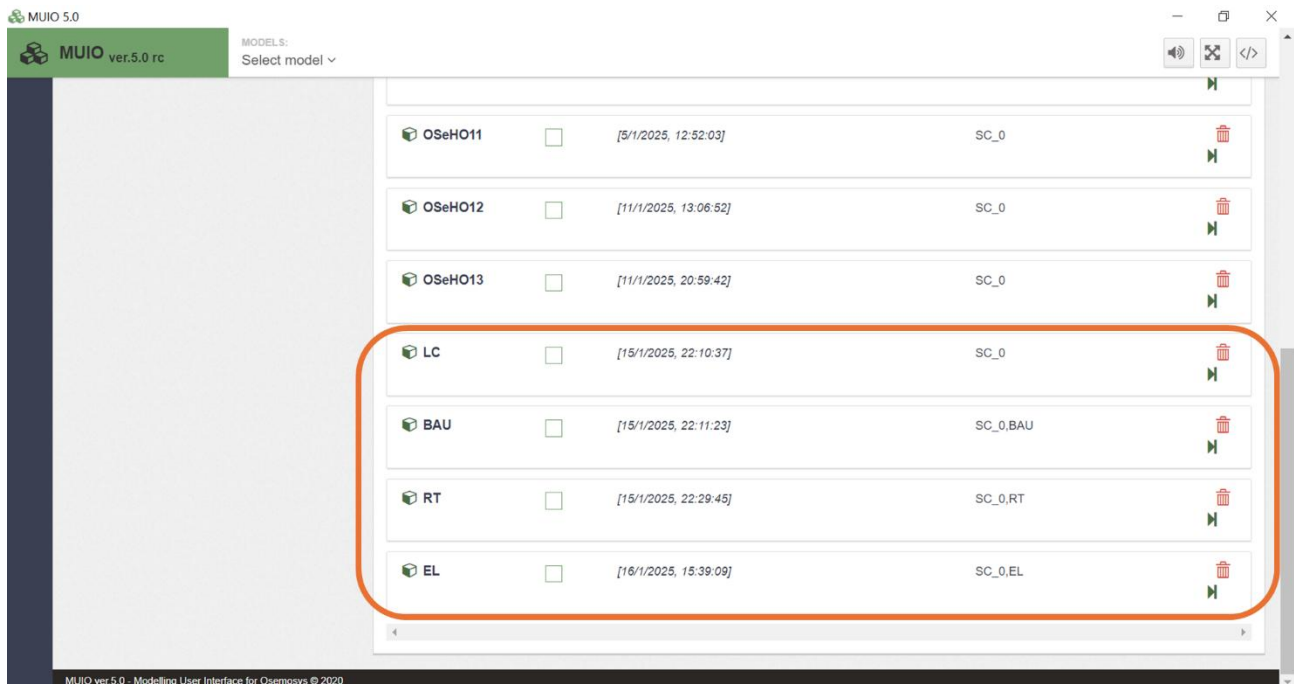


The results of Production By Technology By Mode are the following:

Energy production in the power sector

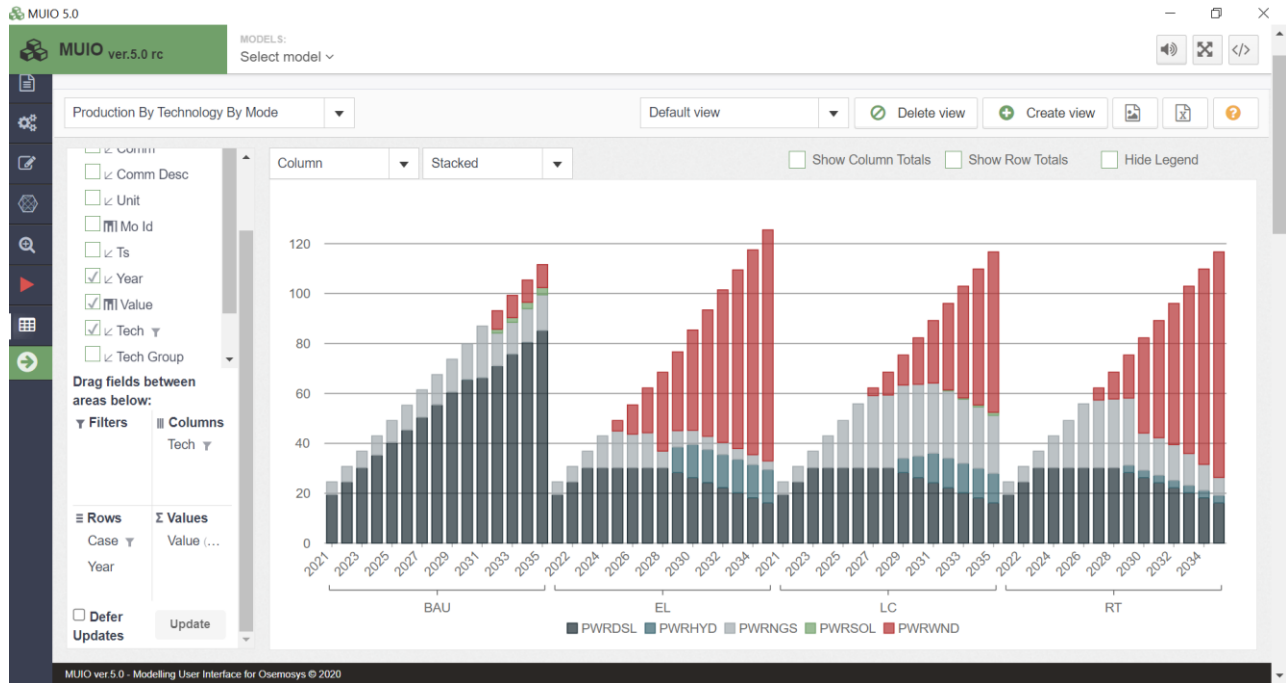


Energy production in the transport sector

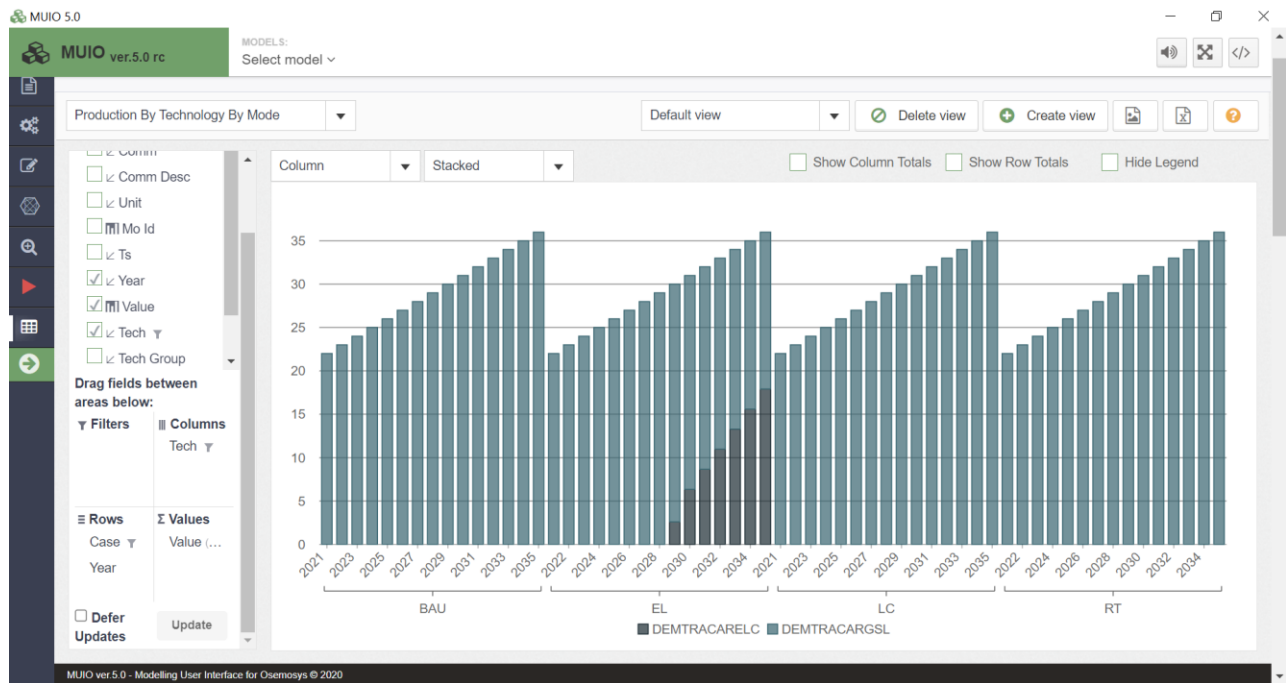




Energy production in the industrial sector

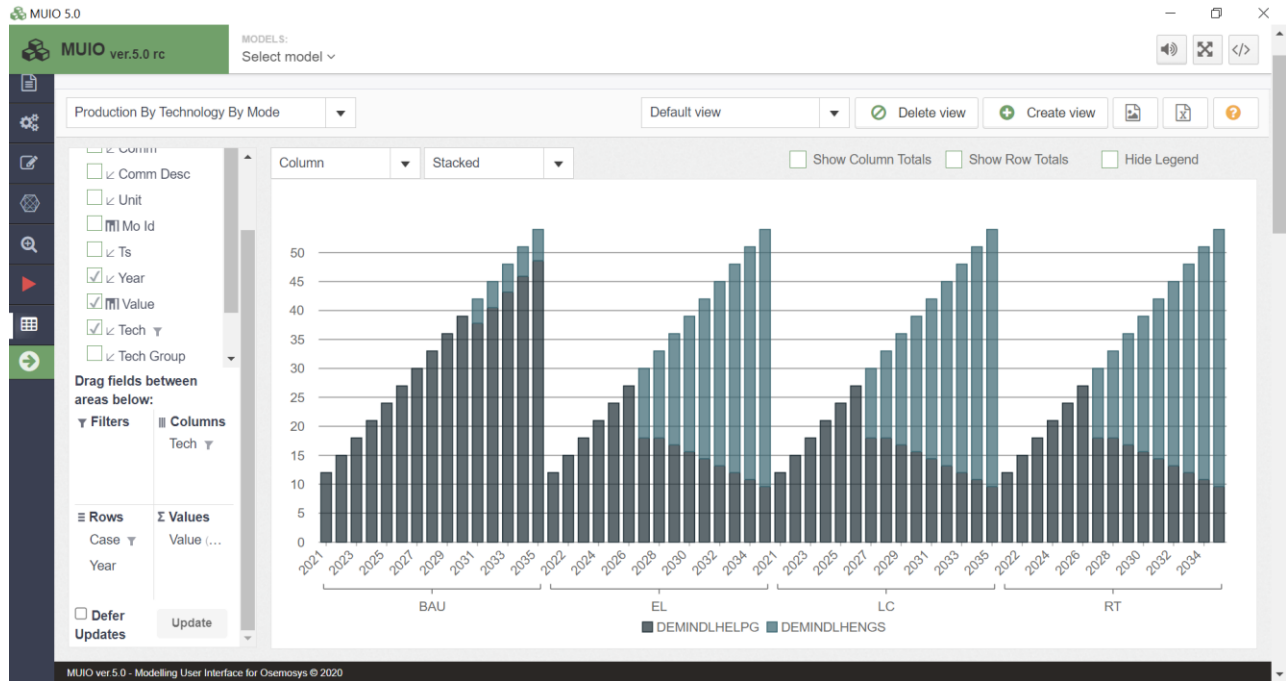

Energy production in the residential sector

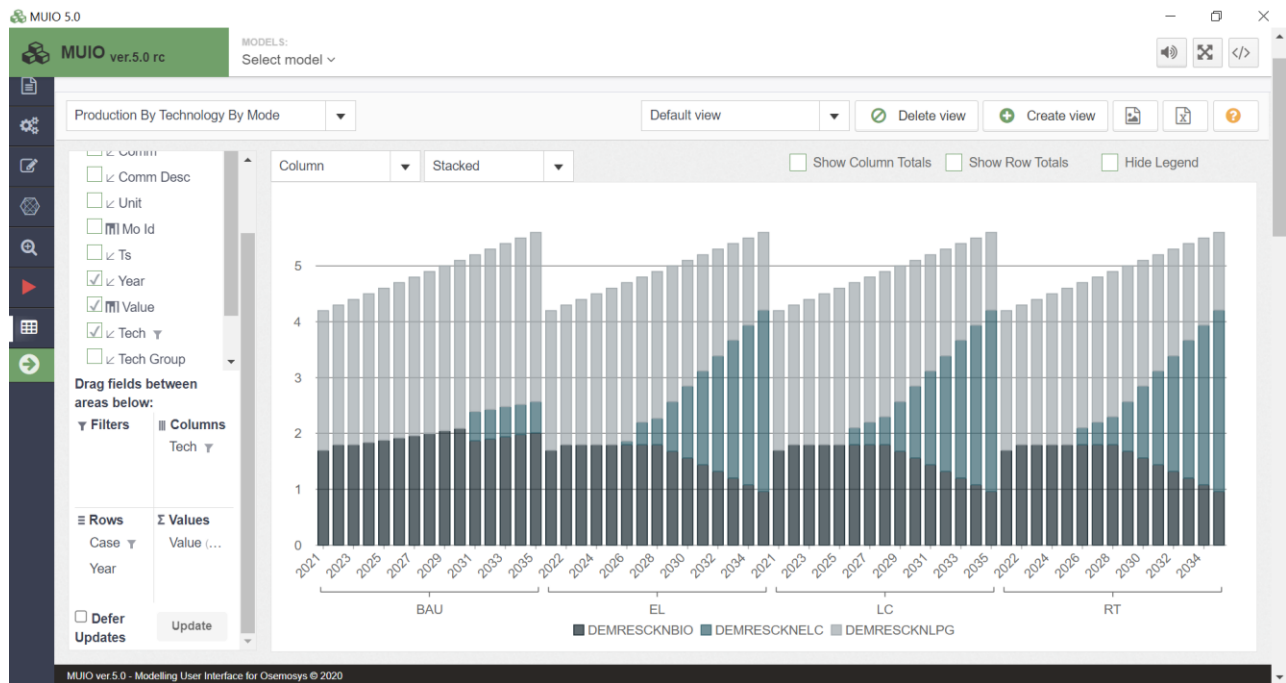



Question to consider: Based on the scenario results, could you provide a summary of key insights for energy planning?